

# Instrument Resistance Spoiler (IRS-1)

Model IRS-1



## Description

The IRS-1 is designed to overcome the problem of high resistance error and tests for reference electrode contact resistance, validating the accuracy of a field reading. The IRS-1 switch is a portable push button device which momentarily changes the input impedance of the digital multimeter. This feature permits the Corrosion Technician to detect high resistance in the external circuit, such as faulty test lead connections or high resistance contact between a reference electrode and the electrolyte.

The “normally-open” switch means the IRS-1 can be left plugged-in without changing the meter's characteristics, but reduces meter input resistance significantly when the push button is depressed. If there is  $\pm 5\%$  (or more) difference in the displayed reading, then there is a contact resistance error that requires correction.


Using the IRS-1 during potential surveys enhances performance by reducing the number of inaccurate readings. True potential values may be calculated in areas with very dry, frozen, or high resistivity soil.

## Features & Benefits

- + Designed to overcome the problem of high resistance reading errors.
- + Method to validate the accuracy of field readings.
- + Quick and convenient to use with no special adapters or tools required.
- + Inexpensive solution for peace of mind.
- + No special training required.
- + Designed for use when soils are dry or frozen.
- + Saves time and money by eliminating repeating site visits to look for favourable soil contact resistance.

## INSTRUCTIONS

<b>Step 1</b>	Without pushing the button on the IRS-1, record the potential ( $V_{\text{meter}}$ )
<b>Step 2</b>	Push and hold the button on the IRS-1, and record the potential ( $V_{\text{spoiled}}$ )
<b>Step 3</b>	Calculate $\Delta V = V_{\text{meter}} - V_{\text{spoiled}}$ if $\Delta V = > 0.05 \times V_{\text{meter}}$ then there is a contact resistance error that requires correcting
<b>Step 4</b>	<p>Calculate the true potential (<math>V_{\text{true}}</math>) as follows;</p> $V_{\text{true}} = \frac{V_{\text{meter}} [1-K]}{1-K \cdot \frac{V_{\text{meter}}}{V_{\text{spoiled}}}}$ <p>Where:  <math>K = \text{spoiler ratio} = R_l / R_h</math>  <math>R_l = \text{lowest input resistance} = \frac{R_{\text{meter}} \cdot R_{\text{spoiler}}}{R_{\text{meter}} + R_{\text{spoiler}}}</math>  <math>R_h = \text{highest input resistance} = R_{\text{meter}}</math> typically 10M<math>\Omega</math> or 20M<math>\Omega</math></p> <p>For instance:            If <math>V_{\text{meter}}</math> is 800mV &amp; <math>V_{\text{spoiled}}</math> is 500mV and  <math>R_{\text{meter}} = 10\text{M}\Omega</math> and <math>R_{\text{spoiler}} = 1\text{M}\Omega</math> then <math>V_{\text{true}}</math> is 851mV</p>

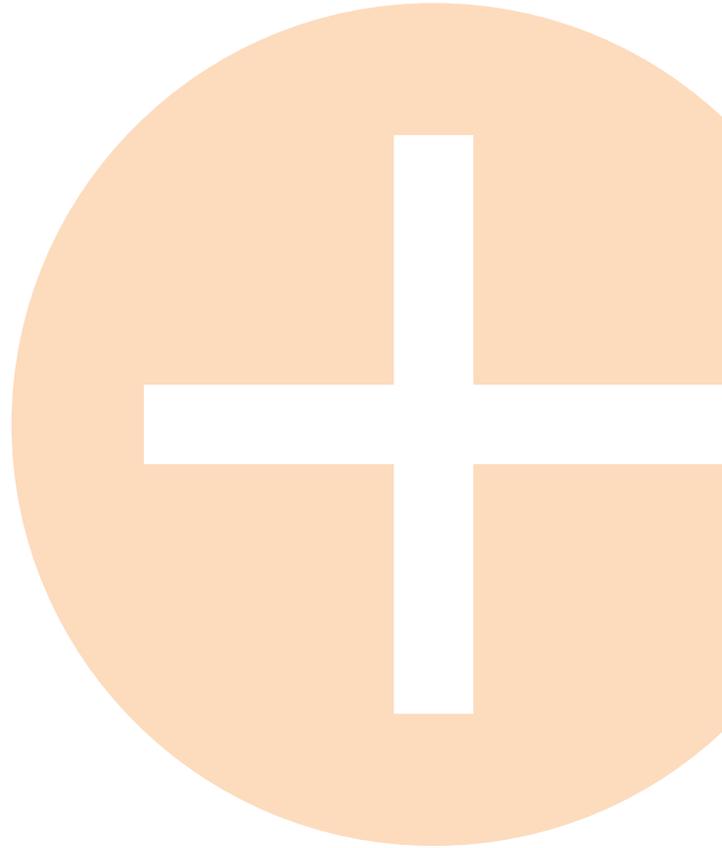

SAM-PCP-18-0002\_REV2

To the best of our knowledge, the data contained herein are true and accurate at the date of issuance and are subject to change without prior notice. User must contact supplier to verify correctness before specifying or ordering. No guarantee of accuracy is given or implied. We assume no responsibility for performance or injuries resulting from use. Liability, if any, is limited to replacement of products. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY THE SELLER, EXPRESS OR IMPLIED, STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.