

IR Free DC Coupon

Model CPMP-3 for Permanent Burial - with STABLE Backfill



The CPMP-3 version of the CPMP series incorporates moisture-wicking material and our patent pending engineered STABLE backfill that significantly improves accuracy, durability and usability.

Reliability

With ever-increasing scrutiny on the energy industry, providing reliable and easy to understand corrosion protection system operation data has become a key requirement for regulatory bodies to assess if critical infrastructure is protected from the risk of failure. However, sources of interference from foreign structures, overhead power lines, and congested pipeline networks make this task increasingly complex and prohibitively expensive.

This is why Corrosion Service engineered the CPMP series of IR Free DC Coupons, which provides a true reliable picture of corrosion protection system operation. The CPMP is accepted by major pipeline, refinery and facility operators as a critical component of their asset integrity programs.

Accuracy


Suitable for use with both new build and existing structures, the CPMP is installed adjacent to the protected structure and contains a permanent internal reference electrode encased in a carbon steel coupon. This innovative design shields the reference electrode from external interference, allowing for highly accurate measurements of the coupon potential and polarization decay. When used in conjunction with the Corrosion Service ZRA zero resistance ammeter, the CPMP provides a direct measurement of cathodic protection current density and further validation of corrosion prevention system operation.

Features & Benefits

- + Validates corrosion prevention system operation on buried pipeline infrastructure.
- + Reduces operating costs by eliminating the need to interrupt foreign sources of interference.
- + Allows confirmation of actual versus design operating parameters.
- + Includes industry first engineered STABLE zinc backfill.
- + Integrated zinc permanent reference electrode.
- + Moisture wicking materials that improve soil contact.
- + Easy hydro-vac or hand excavation for installation in native backfill.
- + Compatible with remote monitoring and data recording hardware.

STABLE

Following years of research, we are proud to include the use of our patent pending engineered STABLE backfill that provides predictable potential measurements vs. standard backfills.

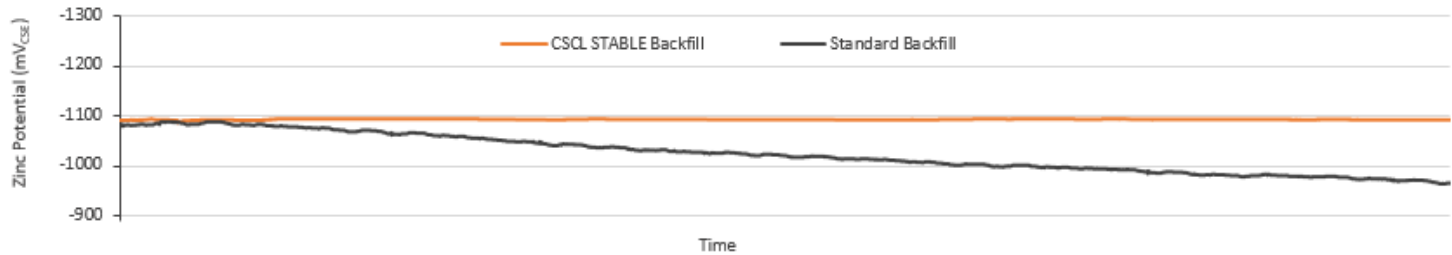

PURPOSE

The coupon is intended to represent a coating holiday on a coated structure or a discrete surface area on a bare structure.

INSTALLATION INSTRUCTIONS

Step 1	Soak the coupon end of the CPMP-3 probe in potable water for 5-10 minutes prior to installation.
Step 2	Install the coupon in the pipe trench at pipe depth, 250mm to 500mm away from the external pipe wall or as per design drawing.
Step 3	Carefully backfill the coupon within a 200mm layer of rock-free native soil and lightly compact by hand.
Step 4	Cut the cables to the required length; some cable may be coiled inside the test station to accommodate settling of the soil.
Step 5	Terminate the coupon wires in the test station or junction box as per design drawings.
Step 6	Connect either the red or the black coupon lead to the pipe lead following coupon installation, as per the operator procedures.

Note

- **NO PARTS OF THE PROBE ASSEMBLY ARE TO BE REMOVED FOR INSTALLATION**
- White lead is connected to internal zinc reference electrode.
- Red and black leads are connected to the coupon.

EXAMPLES OF DATA INTERPRETATION AND CALCULATIONS

Validation of instant OFF polarized potential

Rectifiers ON. Internal reference electrode (ZRE) recently calibrated to $-1103 \text{ mV}_{\text{CSE}}$. Coupon disconnected reading with respect to internal ZRE is 97 mV . Instant OFF potential with respect to Cu/CuSO_4 reference electrode will be: $-1103 + 97 = -1006 \text{ mV}$, indicating that the pipe is protected, according to NACE $-850 \text{ mV}_{\text{CSE}}$ OFF criterion.

Current Requirement Test under Dynamic Stray

Rectifiers ON. Significant dynamic stray current from a DC traction system, so measurements from grade vary from $-435 \text{ mV}_{\text{CSE}}$ to $-1254 \text{ mV}_{\text{CSE}}$. Coupon connected reading with respect to internal ZRE has minimal variation around $+349 \text{ mV}$. A temporary rectifier injects an average of 0.66 A for 1 hour and the coupon polarizes to $+283 \text{ mV}_{\text{ZRE}}$. Current required: $283 \text{ mV} - 349 \text{ mV} = 66 \text{ mV}$ of polarization from test, so $100 \text{ mV} / 66 \text{ mV} * 0.66 \text{ A} = 1 \text{ A}$ would be sufficient to polarize by an additional 100 mV .

Calculation of DC current density

The current measured between the 10 cm^2 coupon and the pipe using a Zero Resistance Ammeter (ZRA) is $100 \mu\text{A}$, with the current returning to the pipeline. The DC current density will be the ratio between the current and the surface area of the coupon. With $100 \mu\text{A}$ converted in $100 \times 10^{-3} \text{ mA}$ and 10 cm^2 converted in $10 \times 10^{-4} \text{ m}^2 = 10^{-3} \text{ m}^2$, the DC current density will be $100 \times 10^{-3} \text{ mA} / 10^{-3} \text{ m}^2 = 100 \text{ mA}/\text{m}^2$.

To the best of our knowledge, the data contained herein are true and accurate at the date of issuance and are subject to change without prior notice. User must contact supplier to verify correctness before specifying or ordering. No guarantee of accuracy is given or implied. We assume no responsibility for performance or injuries resulting from use. Liability, if any, is limited to replacement of products. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY THE SELLER, EXPRESS OR IMPLIED, STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.